

EV6-190B

6V190Ah / 10hr rate



Introduction

Generagy EV AGM Series is designed for tough applications and repeated deep discharging. It is superior with the long cycle life, large current discharge capability, high reliability and safety. The range is the definitive choice for golf cart, electric medical equipment, automated guided vehicles (AGV), aerial lifts, floor cleaning equipment, robotics applications.

Battery Features

- Extra long cycle life and resistance to mechanical stress and the elements all in one battery.
- Maintenance-free
- Very high purity lead (purity rate 99.994%)
- Traction heavy duty grid design gives consistent active material adhesion and corrosion resistance.
- Fully tank formed plates for evenly formed and capacity matched plates.
- Low impurity electrolyte
- Recognized gas recombination efficiency greater than 99.9%
- Flame arresting pressure regulated safety sealing valves for safety.
- Low self-discharge
- Classified as non-spillable and not restricted for transportation by
 - > Air (IATA/ICAO provision 67)
 - > Surface (DOT-CFR-HMR49)
 - > Water (per IMDG amendment 27)

Electrical Specification

Design Life Cycles @ 80% D.O.D. (25°C) 450 Cycles

Nominal Capacity @ 25°C /77°F

100	hour rate	2.28 A to 1.75Vpc	228 Ah
10	hour rate	19 A to 1.75Vpc	190 Ah
5	hour rate	34 A to 1.75Vpc	170 Ah
3	hour rate	50.67 A to 1.70Vpc	152 Ah
1	hour rate	114 A to 1.60Vpc	114 Ah

Minutes of Discharge

25A to 5.25V	400	56A to 5.1V	156
75A to 5.1V	108	85A to 5.1V	88
100A to 5.1V	68			

Cranking Amps

0°C /32°F	980	-18°C /0°F	810
-----------	-------	-----	------------	-------	-----

Internal Resistance

(Fully charged battery @ 25°C /77°F) 3.5 mΩ

Max. Discharge Current @ 25°C /77°F1050 A (5S)

Charge Methods: Constant voltage charge @ 25°C /77°F

Cycle Use	7.35 ~ 7.45V
Max. Current	47.5 A
Standby Use	6.8 - 6.9V

Operating Temperature Range -20 ~ 60°C

Notes: battery voltage must be adjusted according to temperature.

Please refer to our recommendation.

Self-Discharge


3% of capacity declined per month @ 25°C (77°F).

Battery Picture & Terminal Layout

ABS Case Colour
7628C



Terminal Type: T14



Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height			
244 mm	185 mm	275 mm	275 mm	29.5 kg	
9.6 inch	7.3 inch	10.8 inch	10.8 inch	65.0 lbs	

Typical Applications

- Golf Cart
- Tour Bus
- Electric Medical Equipments
- Aerial and Fork Lifts
- Golf Trolley
- Sweeper
- Floor Cleaning Machines
- Marine and RV

Certificates





EV6-190B


6V190Ah / 10hr rate




Graphs

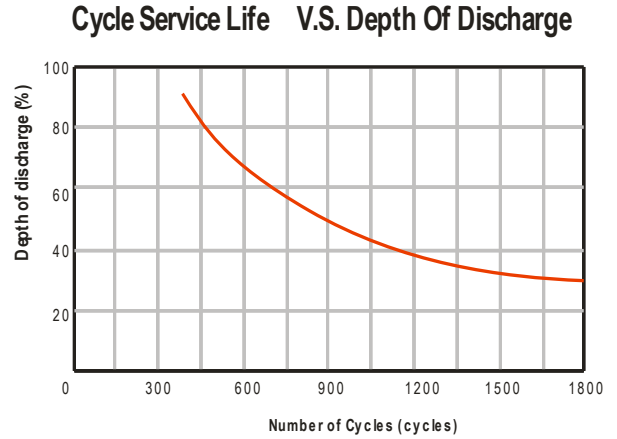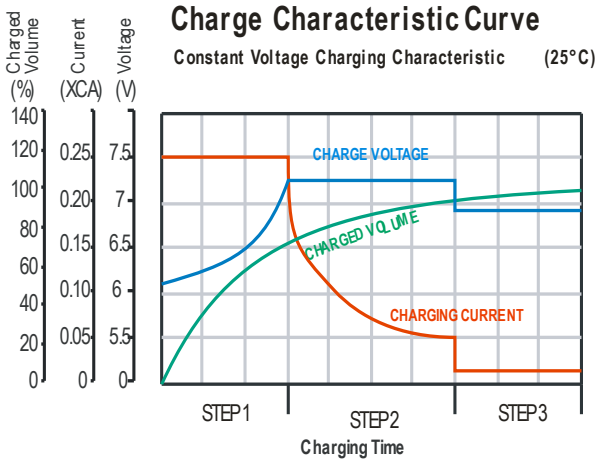


OCV V.S. State of Charge (20°C)

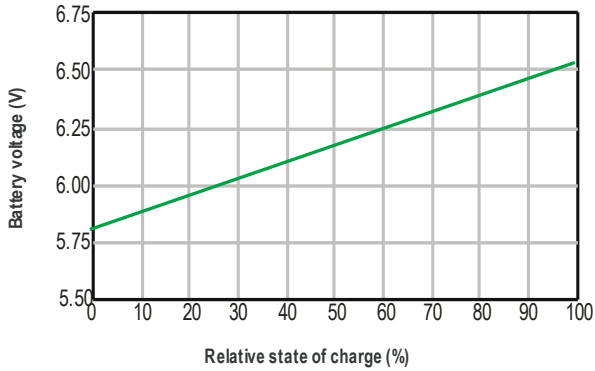


Self-Discharge Characteristic

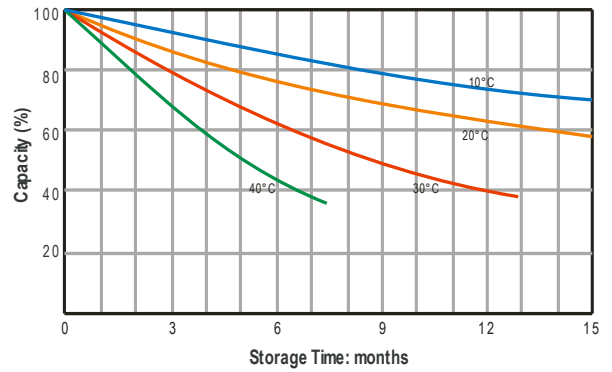

Charging Voltage V.S. Temperature

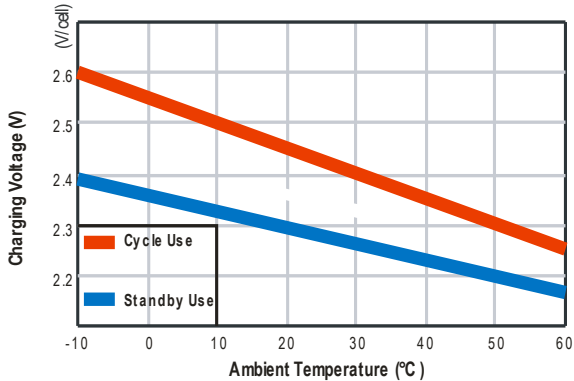

Temperature Effects On Capacity

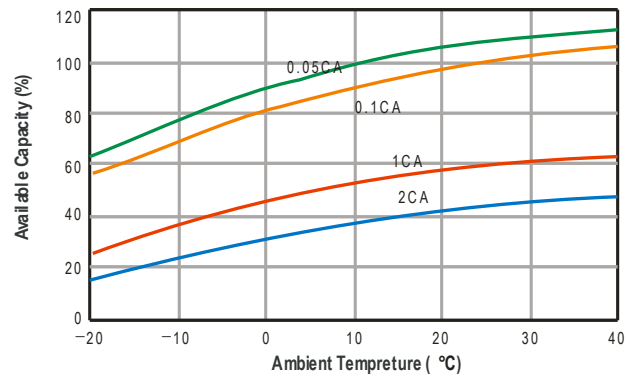

Subject to revision without notice. Please contact our sales representatives for latest version.