

# EV6-210A

6V210Ah / 10hr rate



### Introduction

**Generagy EV AGM Series** is designed for tough applications and repeated deep discharging. It is superior with the long cycle life, large current discharge capability, high reliability and safety. The range is the definitive choice for golf cart, electric medical equipment, automated guided vehicles (AGV), aerial lifts, floor cleaning equipment, robotics applications.

### Battery Features

- Extra long cycle life and resistance to mechanical stress and the elements all in one battery.
- Maintenance-free
- Very high purity lead (purity rate 99.994%)
- Traction heavy duty grid design gives consistent active material adhesion and corrosion resistance.
- Fully tank formed plates for evenly formed and capacity matched plates.
- Low impurity electrolyte
- Recognized gas recombination efficiency greater than 99.9%
- Flame arresting pressure regulated safety sealing valves for safety.
- Low self-discharge
- Classified as non-spillable and not restricted for transportation by
  - > Air (IATA/ICAO provision 67)
  - > Surface (DOT-CFR-HMR49)
  - > Water (per IMDG amendment 27)

### Electrical Specification

Design Life Cycles @ 80% D.O.D. (25°C) ..... 450 Cycles

Nominal Capacity @ 25°C /77°F

100	hour rate	2.52 A to 1.75Vpc	.....	252 Ah
10	hour rate	21 A to 1.75Vpc	.....	210 Ah
5	hour rate	38 A to 1.75Vpc	.....	190 Ah
3	hour rate	56 A to 1.70Vpc	.....	168 Ah
1	hour rate	126 A to 1.60Vpc	.....	126 Ah

Minutes of Discharge

25A to 5.25V	.....	450	56A to 5.1V	.....	175
75A to 5.1V	.....	120	85A to 5.1V	.....	98
100A to 5.1V	.....	75			

Cranking Amps

0°C /32°F ..... 1100      -18°C /0°F ..... 900

Internal Resistance

(Fully charged battery @ 25°C /77°F) ..... 3.2 mΩ

Max. Discharge Current @ 25°C /77°F .....1150 A (5S)

Charge Methods: Constant voltage charge @ 25°C /77°F

Cycle Use	.....	7.35 ~ 7.45V
Max. Current	.....	52.5 A
Standby Use	.....	6.8 - 6.9V

Operating Temperature Range ..... -20 ~ 60°C

Notes: battery voltage must be adjusted according to temperature.

Please refer to our recommendation.

Self-Discharge


3% of capacity declined per month @ 25°C (77°F).

### Battery Picture & Terminal Layout

ABS Case Colour  
7628C



Terminal Type: T14



### Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height			
260 mm	180 mm	247 mm	251 mm	29.5 kg	
10.2 inch	7.1 inch	9.7 inch	9.9 inch	65.0 lbs	

### Typical Applications

- Golf Cart
- Tour Bus
- Electric Medical Equipments
- Aerial and Fork Lifts
- Golf Trolley
- Sweeper
- Floor Cleaning Machines
- Marine and RV

### Certificates





# EV6-210A


6V210Ah / 10hr rate




**Graphs**

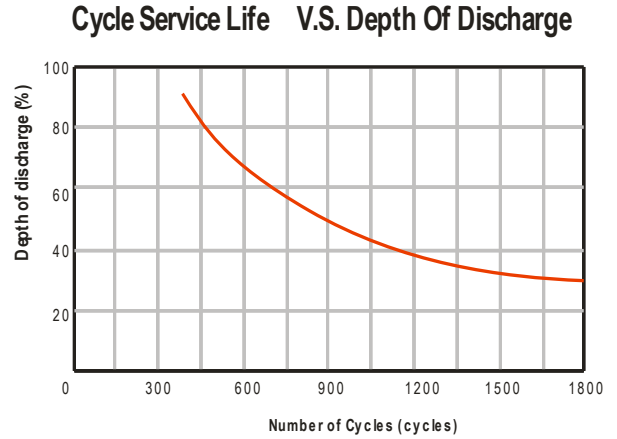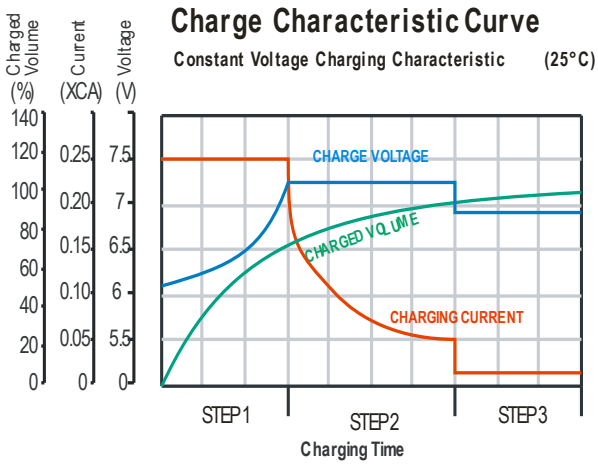


### OCV V.S. State of Charge (20°C)

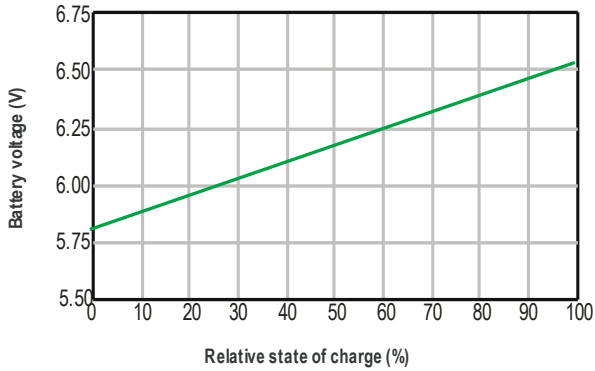


### Self-Discharge Characteristic

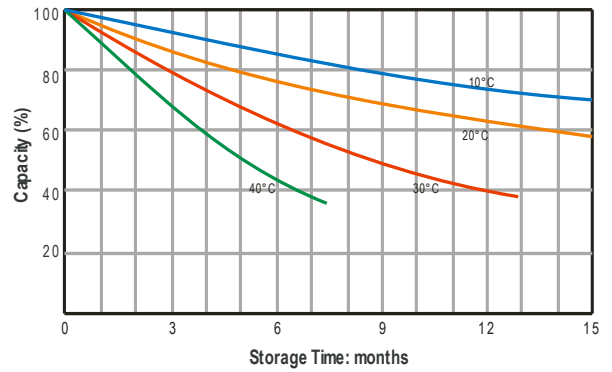

### Charging Voltage V.S. Temperature

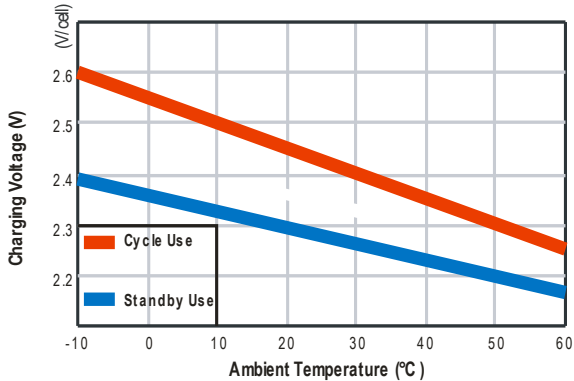

### Temperature Effects On Capacity

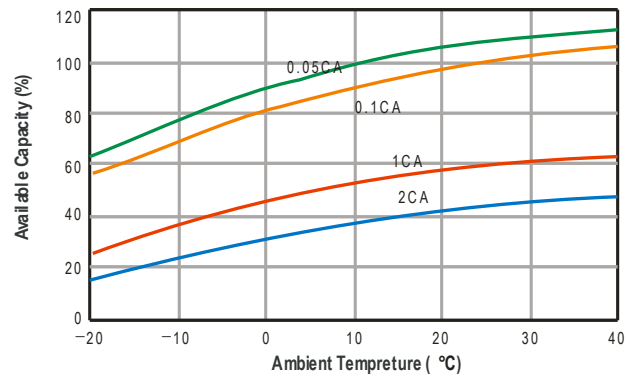

Subject to revision without notice. Please contact our sales representatives for latest version.