

# EV8-150

8V150Ah / 10hr rate



### Introduction

**Generagy EV AGM Series** is designed for tough applications and repeated deep discharging. It is superior with the long cycle life, large current discharge capability, high reliability and safety. The range is the definitive choice for golf cart, electric medical equipment, automated guided vehicles (AGV), aerial lifts, floor cleaning equipment, robotics applications.

### Battery Features

- Extra long cycle life and resistance to mechanical stress and the elements all in one battery.
- Maintenance-free
- Very high purity lead (purity rate 99.994%)
- Traction heavy duty grid design gives consistent active material adhesion and corrosion resistance.
- Fully tank formed plates for evenly formed and capacity matched plates.
- Low impurity electrolyte
- Recognized gas recombination efficiency greater than 99.9%
- Flame arresting pressure regulated safety sealing valves for safety.
- Low self-discharge
- Classified as non-spillable and not restricted for transportation by
  - > Air (IATA/ICAO provision 67)
  - > Surface (DOT-CFR-HMR49)
  - > Water (per IMDG amendment 27)

### Electrical Specification

Design Life Cycles @ 80% D.O.D. (25°C) .....	450 Cycles
Nominal Capacity @ 25°C /77°F	
100 hour rate 1.8 A to 1.75Vpc .....	180 Ah
10 hour rate 15 A to 1.75Vpc .....	150 Ah
5 hour rate 27 A to 1.75Vpc .....	135 Ah
3 hour rate 40 A to 1.70Vpc .....	120 Ah
1 hour rate 90 A to 1.60Vpc .....	90 Ah
Minutes of Discharge	
25A to 7.0V .....	310
56A to 6.8V .....	120
75A to 6.8V .....	83
85A to 6.8V .....	76
100A to 6.8V .....	50
Cranking Amps	
0°C /32°F .....	780
-18°C /0°F .....	650
Internal Resistance	
(Fully charged battery @ 25°C /77°F) .....	4.5 mΩ
Max. Discharge Current @ 25°C /77°F .....	900 A (5S)
Charge Methods: Constant voltage charge @ 25°C /77°F	
Cycle Use .....	9.8~ 9.93 V
Max. Current .....	37.5 A
Standby Use .....	9.07 - 9.2V
Operating Temperature Range .....	-20 ~ 60°C
<i>Notes: battery voltage must be adjusted according to temperature. Please refer to our recommendation.</i>	
Self-Discharge	
3% of capacity declined per month @ 25°C (77°F).	

### Battery Picture & Terminal Layout

ABS Case Colour  
7628C

Terminal Type: T14

### Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height			
260 mm	180 mm	266 mm	270 mm	31.5 kg	
10.2 inch	7.1 inch	10.5 inch	10.6 inch	69.4 lbs	

### Typical Applications

- Golf Cart
- Tour Bus
- Electric Medical Equipments
- Aerial and Fork Lifts
- Golf Trolley
- Sweeper
- Floor Cleaning Machines
- Marine and RV

### Certificates









# EV8-150

8V150Ah / 10hr rate



**Graphs**

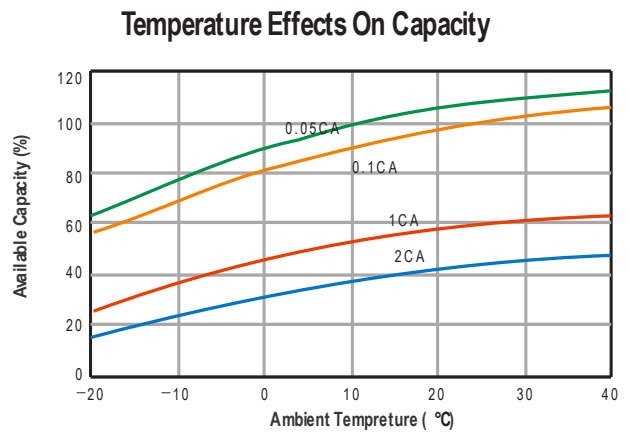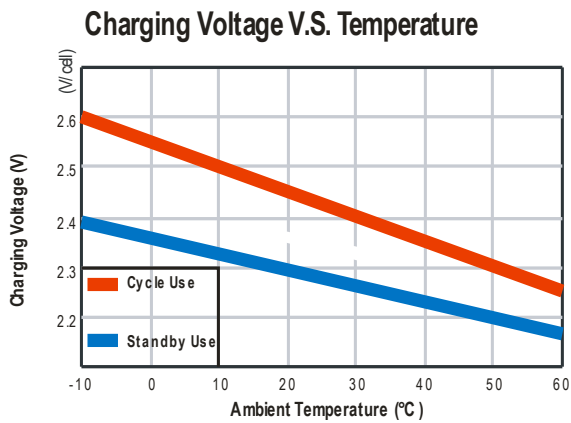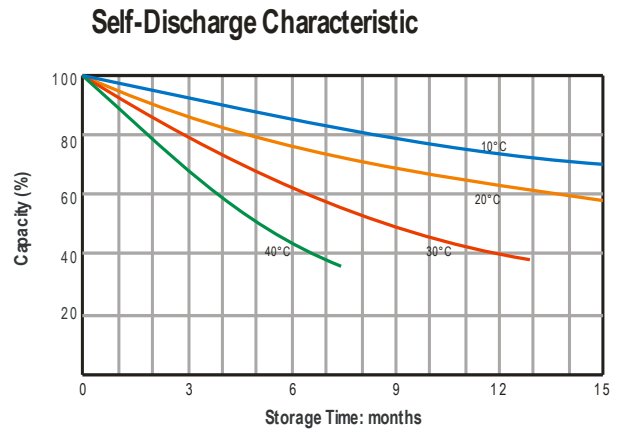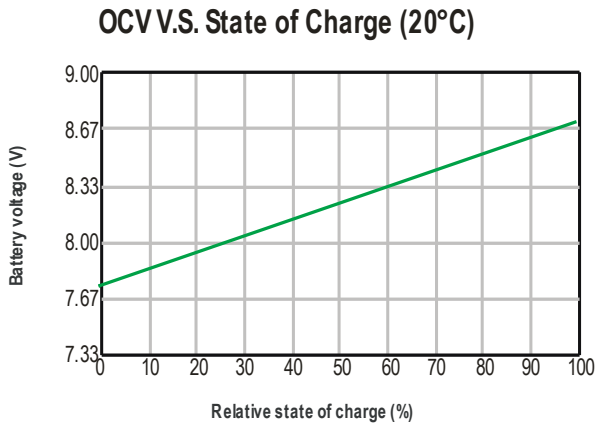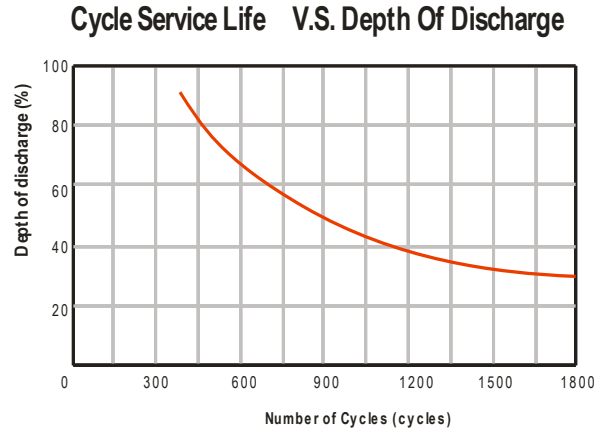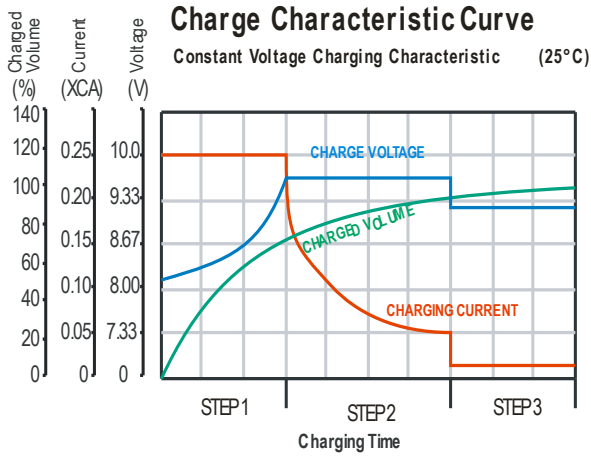

Subject to revision without notice. Please contact our sales representatives for latest version.