

EV12-156

12V156Ah / 10hr rate



Introduction

Generagy EV AGM Series is designed for tough applications and repeated deep discharging. It is superior with the long cycle life, large current discharge capability, high reliability and safety. The range is the definitive choice for golf cart, electric medical equipment, automated guided vehicles (AGV), aerial lifts, floor cleaning equipment, robotics applications.


Battery Features

- Extra long cycle life and resistance to mechanical stress and the elements all in one battery.
- Maintenance-free
- Very high purity lead (purity rate 99.994%)
- Traction heavy duty grid design gives consistent active material adhesion and corrosion resistance.
- Fully tank formed plates for evenly formed and capacity matched plates.
- Low impurity electrolyte
- Recognized gas recombination efficiency greater than 99.9%
- Flame arresting pressure regulated safety sealing valves for safety.
- Low self-discharge
- Classified as non-spillable and not restricted for transportation by
 - > Air (IATA/ICAO provision 67)
 - > Surface (DOT-CFR-HMR49)
 - > Water (per IMDG amendment 27)

Electrical Specification

Design Life Cycles @ 80% D.O.D. (25°C)	450 Cycles
Nominal Capacity @ 25°C /77°F	
100 hour rate 1.872A to 1.75Vpc	187.2Ah
10 hour rate 15.6A to 1.75Vpc	156 Ah
5 hour rate 28A to 1.75Vpc	140Ah
3 hour rate 41.6 A to 1.70Vpc	125Ah
1 hour rate 93.6A to 1.60Vpc	93.6Ah
Minutes of Discharge	
25A to 10.5V	320
56A to 10.2V	124
75A to 10.2V	86
85A to 10.2V	70
100A to 10.2V	54
Cranking Amps	
0°C /32°F	810
-18°C /0°F	670
Internal Resistance	
(Fully charged battery @ 25°C /77°F)	6 mΩ
Max. Discharge Current @ 25°C /77°F	930A (5S)
Charge Methods: Constant voltage charge @ 25°C /77°F	
Cycle Use	14.7 ~ 14.9V
Max. Current	39 A
Standby Use	13.6 - 13.8V
Operating Temperature Range	-20 ~ 60°C
<i>Notes: battery voltage must be adjusted according to temperature. Please refer to our recommendation.</i>	
Self-Discharge	
3% of capacity declined per month @ 25°C (77°F).	

Battery Picture & Terminal Layout

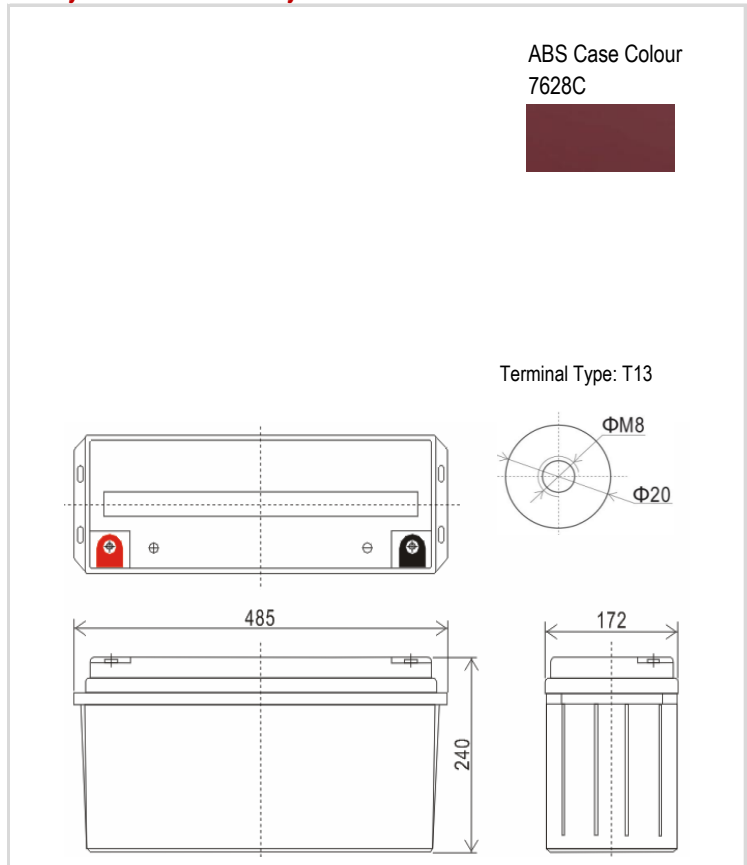

Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height	Total Height		
485 mm	172 mm	240 mm	240 mm	49 kg	
19.1 inch	6.8 inch	9.4 inch	9.4 inch	108.0 lbs	

Typical Applications

- Golf Cart
- Tour Bus
- Electric Medical Equipments
- Aerial and Fork Lifts
- Golf Trolley
- Sweeper
- Floor Cleaning Machines
- Marine and RV

Certificates





EV12-156


12V156Ah / 10hr rate




Graphs

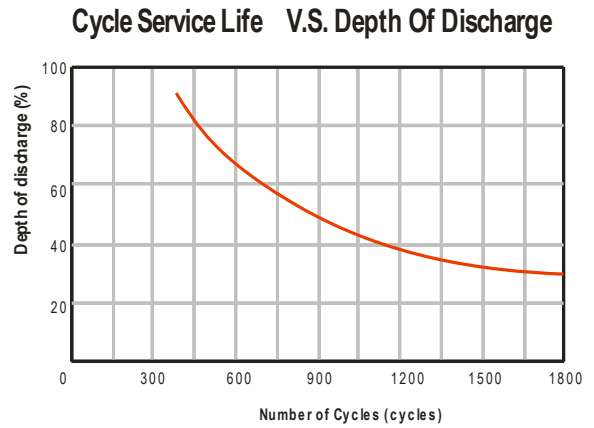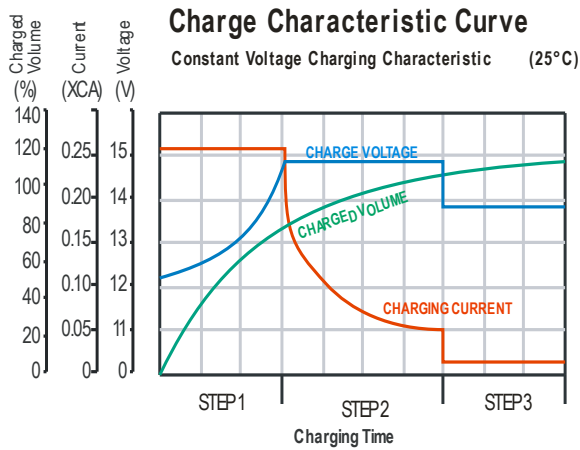


OCV V.S. State of Charge (20°C)

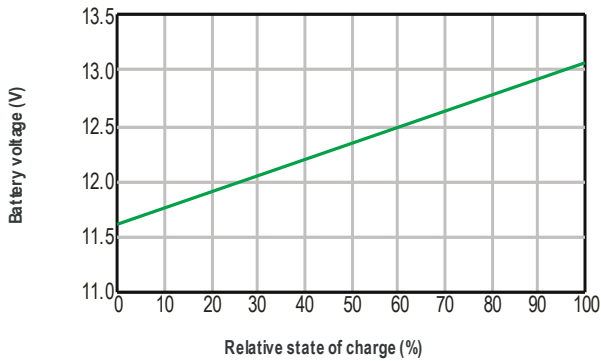


Self-Discharge Characteristic

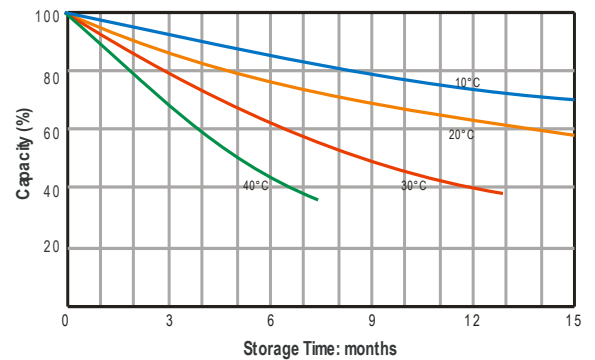

Charging Voltage V.S. Temperature

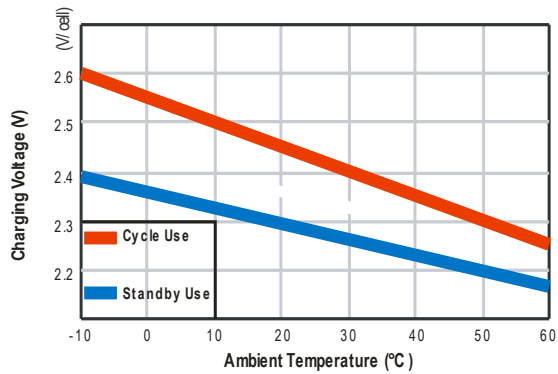

Temperature Effects On Capacity

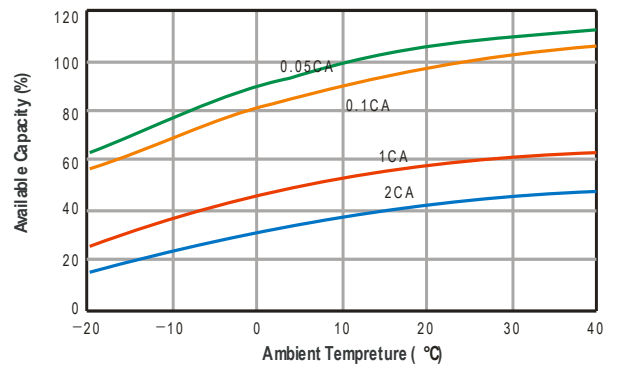

Subject to revision without notice. Please contact our sales representatives for latest version.