

# NH12-33W

12V33W / 15min



## Introduction

**Generagy NH (high rate) series** is primarily for all critical power and UPS applications. Designed with a high-density plate technology, the series battery is featured of high consistency, excellent performance and reliable standby service life. It is widely applied in UPS/EPS, high power backup system and emergency power supply.

## Battery Features

- High rate output aimed at the UPS market
- Low self-discharge
- Fully tank formed plates
- Low impurity electrolyte
- Spill proof / leak proof
- Multi-position usage
- ABS case and cover VO upon request
- Very high purity lead

## Electrical Specification

Design floating Life @ 25°C (77°F)	5 years
Nominal Capacity @ 25°C /77°F	
Watt @ 15min to 1.67V/cell	33 W/cell
Watt @ 10min to 1.67V/cell	43 W/cell

### Internal Resistance

(Fully charged battery @ 25°C /77°F) ..... 19mΩ

Max. Discharge Current @ 25°C /77°F ..... 117A (5S)

### Charge Methods: Constant voltage charge @ 25°C /77°F

Cycle Use	14.7 ~ 14.9V
Max. Current	1.8A
Standby Use	13.6 - 13.8V

Operating Temperature Range ..... -30 ~ 50°C

Notes: battery voltage must be adjusted according to temperature.

Please refer to our recommendation.


### Self-Discharge

3% of capacity declined per month @ 25°C (77°F).

## Typical Applications

- UPS/EPS (High rate)
- High power backup supply
- Emergency power supply
- Emergency lighting
- Electric starting

## Battery Picture & Terminal Layout

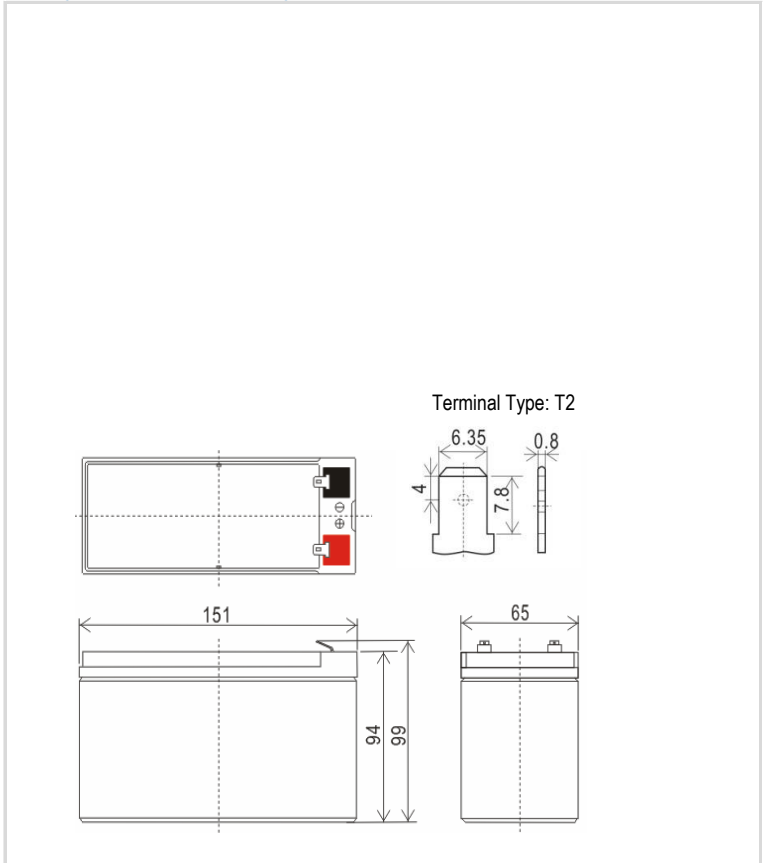

## Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height	Height		
151 mm	65 mm	94 mm	99 mm	2.28 kg	
5.9 inch	2.6 inch	3.7 inch	3.9 inch	5.0 lbs	

## Constant Current Discharge (Amperes @ 25°C /77°F)

V/cell	10min	15min	20min	30min	45min	55min	1hr	2hr	3hr
1.60	27.27	21.03	16.60	11.57	8.22	7.23	6.73	3.65	2.70
1.65	25.86	20.06	15.76	11.09	7.87	6.91	6.46	3.49	2.59
1.70	24.35	18.82	14.88	10.47	7.47	6.56	6.20	3.34	2.48
1.75	22.85	17.58	13.99	9.85	7.07	6.21	5.93	3.19	2.37
1.80	21.25	16.38	13.06	9.14	6.63	5.83	5.67	3.04	2.26

## Constant Power Discharge (Watts/cell @ 25°C /77°F)

V/cell	10min	15min	20min	30min	45min	55min	1hr	2hr	3hr
1.60	45.2	35.1	27.6	21.55	15.56	13.89	12.83	6.97	5.10
1.65	43.7	33.8	26.5	20.60	14.92	13.37	12.49	6.77	4.96
<b>1.67</b>	<b>43.1</b>	<b>33.2</b>	<b>26.1</b>	<b>20.08</b>	<b>14.61</b>	<b>13.12</b>	<b>12.31</b>	<b>6.67</b>	<b>4.89</b>
1.70	42.2	32.5	25.4	19.65	14.23	12.80	12.10	6.55	4.80
1.75	40.5	31.2	24.3	18.71	13.54	12.24	11.71	6.33	4.64
1.80	38.6	29.7	23.0	17.67	12.81	11.62	11.28	6.08	4.47

## Certificates











# NH12-33W

12V33W / 15min



Graphs

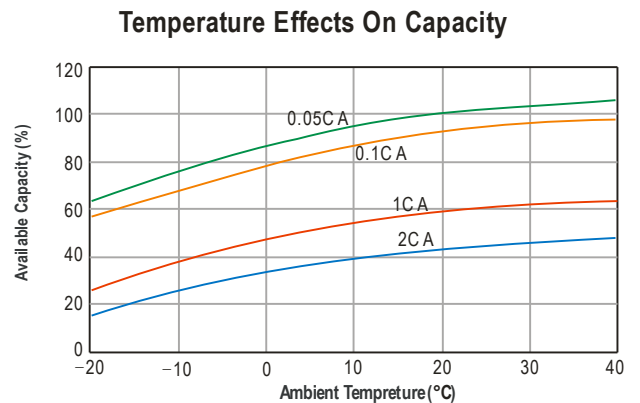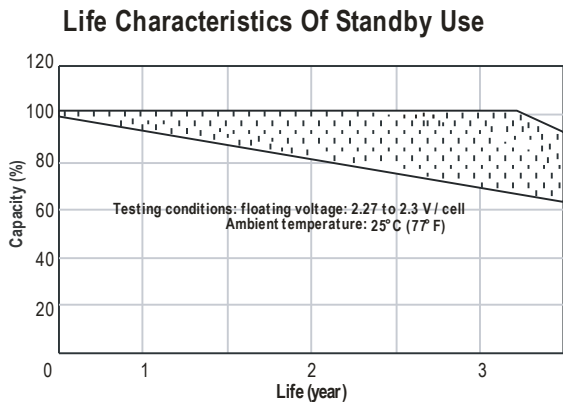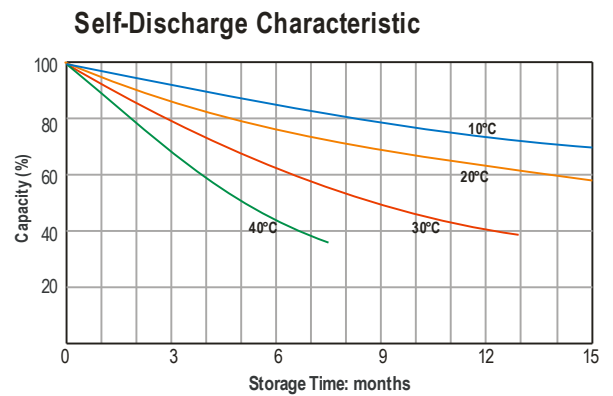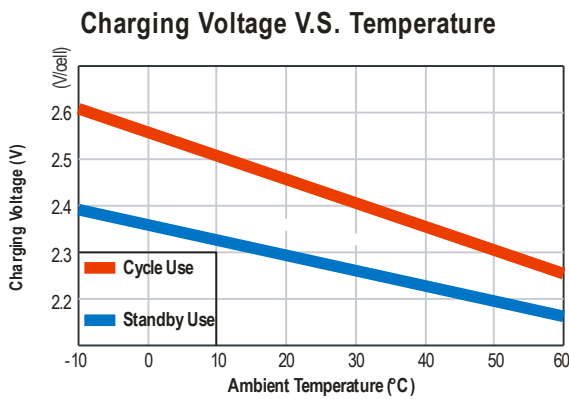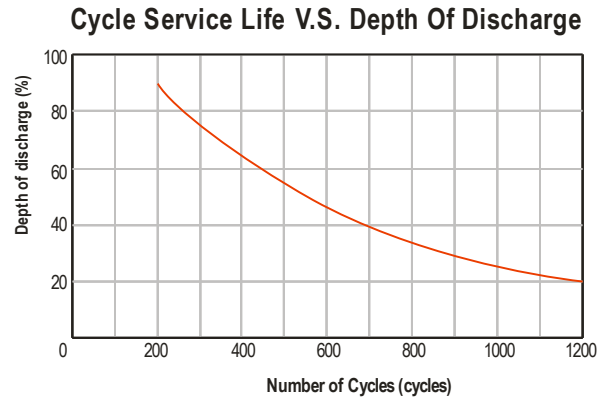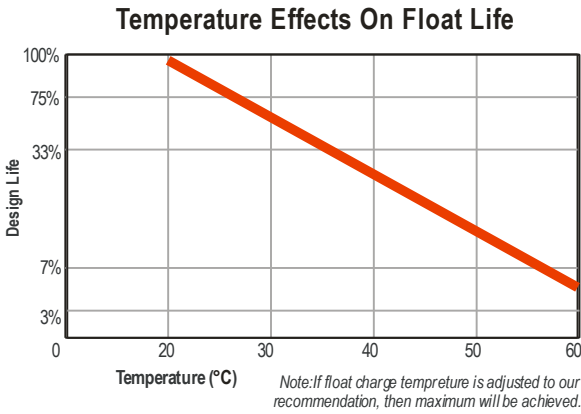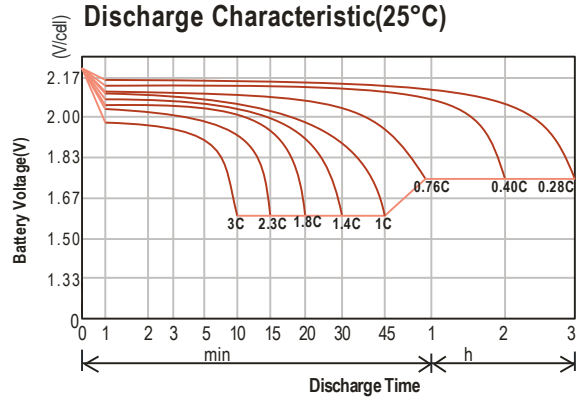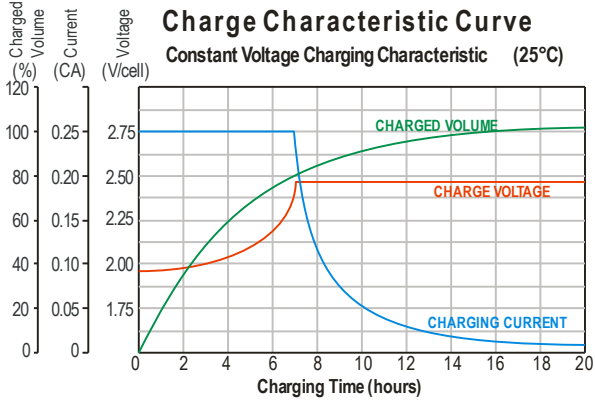

Subject to revision without notice. Please contact our sales representatives for latest version.

Web: [www.genergybattery.com](http://www.genergybattery.com) | Email: [sales@genergybattery.com](mailto:sales@genergybattery.com)