

EB12-80

12V80Ah / 10hr rate



Introduction

Generagy EB series is designed for European standard with 12-year design life in float service. The series battery is featured of high consistency, excellent performance and reliable standby service life. It is widely applied in float service, UPS/EPS, medical equipment, telecom, photovoltaic, control system and security system.

Battery Features

- Increase durability and deep cycle ability for heavy demand applications
- Low self-discharge
- Fully tank formed plates
- Low impurity electrolyte
- Spill proof / leak proof
- Multi-position usage
- ABS case and cover VO upon request
- Very high purity lead

Electrical Specification

Design floating Life @ 20°C (68°F)	12 years
Nominal Capacity @ 20°C /68°F	
20 hour rate 4.22A to 1.75Vpc	84 Ah
10 hour rate 8.01A to 1.80Vpc	80 Ah

Internal Resistance

(Fully charged battery @ 20°C /68°F) 6 mΩ

Max. Discharge Current @ 20°C /68°F 800 A (5S)

Charge Methods: Constant voltage charge @ 20°C /68°F

Cycle Use 14.7 ~ 14.9V

Max. Current 21 A

Standby Use 13.6 - 13.8V

Operating Temperature Range -30 ~ 50°C


Notes: battery voltage must be adjusted according to temperature.

Please refer to our recommendation.

Self-Discharge

<3% of capacity declined per month @ 20°C (68°F).

Battery Picture & Terminal Layout

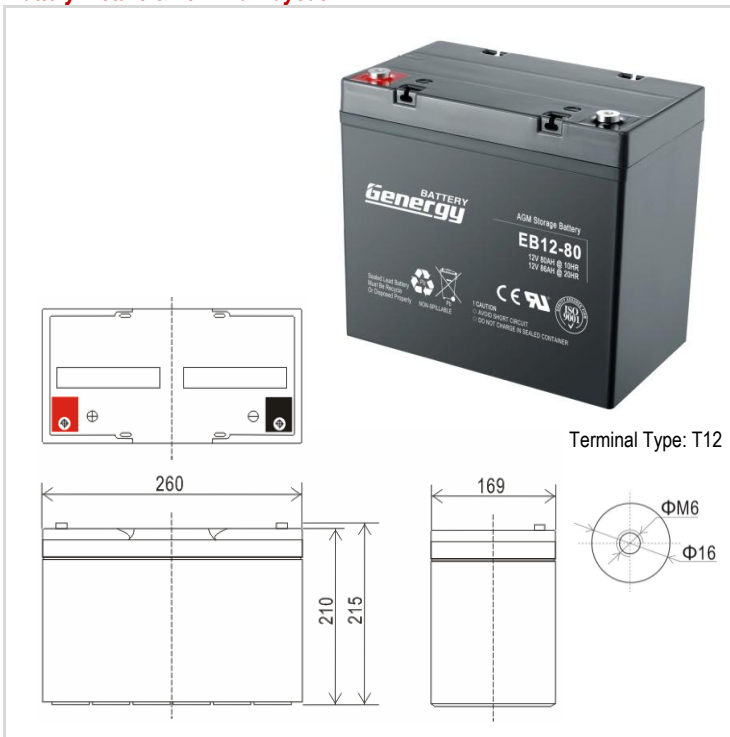

Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height	Total Height		
260 mm	169 mm	210 mm	215 mm	23.5 kg	
10.2 inch	6.7 inch	8.3 inch	8.5 inch	51.8 lbs	

Typical Applications

- UPS & EPS
- Telecommunications
- Power Utility
- Security Power Supply

Certificates



Constant Current Discharge (Amperes @ 20°C /68°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	196.95	150.34	130.46	110.58	95.29	84.96	79.22	73.49	69.65	64.82	60.79	33.03	24.06	19.67	16.08	8.59	4.34
1.65	187.02	142.76	124.00	105.23	91.07	81.12	75.77	70.43	66.98	62.53	58.89	31.64	23.17	18.89	15.41	8.39	4.26
1.70	179.29	136.87	119.10	101.34	88.17	78.43	73.30	68.16	64.92	60.69	57.25	30.56	22.64	18.44	15.05	8.31	4.26
1.75	171.02	130.55	113.79	97.02	84.86	75.47	70.68	65.89	63.00	59.11	56.02	29.70	22.16	18.04	14.72	8.23	4.22
1.80	162.19	123.81	108.19	92.57	81.55	72.44	67.93	63.42	60.81	57.20	54.39	28.62	21.63	17.60	14.36	8.01	4.18

Constant Power Discharge (Watts/cell @ 20°C /68°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	342.04	261.10	229.78	198.46	173.24	156.05	144.96	133.87	125.47	115.68	108.59	60.09	44.08	36.44	30.01	16.82	8.87
1.65	329.90	251.83	222.08	192.34	168.69	151.92	141.24	130.57	122.59	113.22	106.55	58.87	43.67	36.04	29.61	16.66	8.87
1.70	317.21	242.15	213.83	185.52	163.31	147.09	136.98	126.86	119.44	110.62	104.50	57.44	42.86	35.41	29.16	16.33	8.75
1.75	303.42	231.62	204.88	178.15	157.52	141.86	132.30	122.73	115.87	107.61	102.05	55.61	41.65	34.54	28.64	16.21	8.59
1.80	288.52	220.25	195.24	170.22	151.31	136.21	127.20	118.20	111.90	104.19	99.19	53.63	40.56	33.67	27.99	16.05	8.51

Subject to revision without notice. Please contact our sales representatives for latest version.


Web: www.generagybattery.com | Email: sales@generagybattery.com

EB12-80

12V80Ah / 10hr rate



Graphs

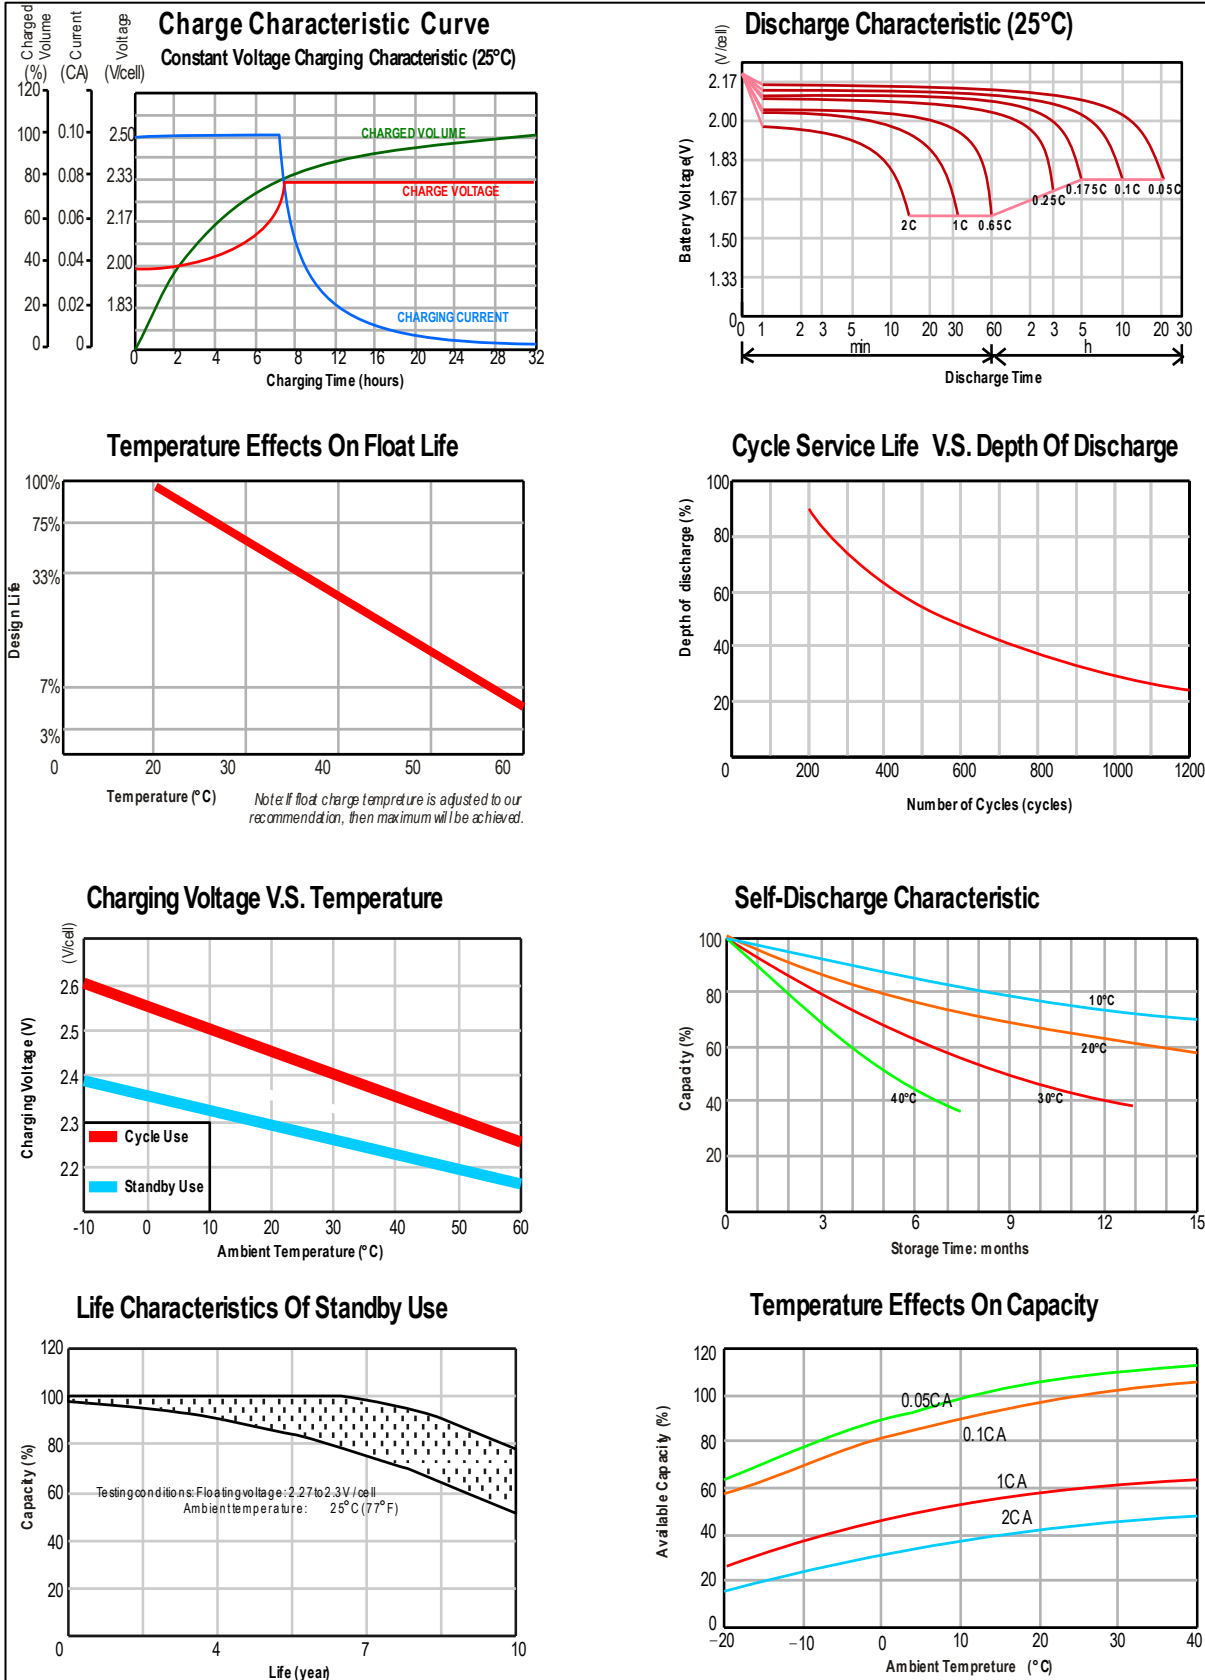

Subject to revision without notice. Please contact our sales representatives for latest version.