

NL2-3000

2V3000Ah / 10hr rate



Introduction

Genergy NL (2V) series is designed for standby use with 15-year design life in float service. The series battery is featured of high consistency, excellent performance and reliable standby service life. It is widely applied in Telecoms, Power Utility, Renewables, UPS/EPS, and medical equipment.


Key Features

- Valve regulated maximum internal pressure 2.5 PSI
- Increase durability and deep cycle ability for heavy demand applications
- Low self-discharge
- Fully tank formed plates
- Low impurity electrolyte
- Spill proof / leak proof
- Multi-position usage
- ABS case and cover VO upon request
- Very high purity lead

Electrical Specification

Design floating Life @ 25°C (77°F)	15 years
Nominal Capacity @ 25°C /77°F	
20 hour rate 161.4A to 1.75Vpc	3228 Ah
10 hour rate 307.7A to 1.75Vpc	3077 Ah
Internal Resistance	
(Fully charged battery @ 25°C /77°F)	0.28 mΩ
Max. Discharge Current @ 25°C /77°F	6000 A (5S)
Charge Methods: Constant voltage charge @ 25°C /77°F	
Cycle Use	2.45 ~ 2.49V
Max. Current	560 A
Standby Use	2.25 ~ 2.30V
Operating Temperature Range	-30 ~ 50°C
<i>Notes: battery voltage must be adjusted according to temperature. Please refer to our recommendation.</i>	
Self-Discharge	
	3% of capacity declined per month @ 25°C (77°F).

Battery Picture & Terminal Layout

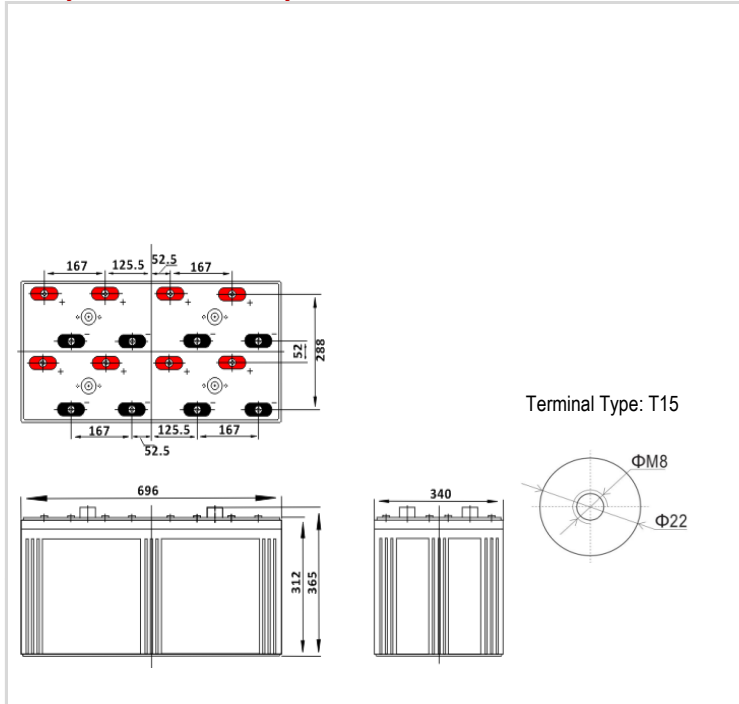

Dimension & Weight

Length	Dimension (± 2mm)			Weight (± 2%)
	Width	Height	Total Height	
696 mm	340 mm	312 mm	365 mm	185.3 kg
27.4 inch	13.4 inch	12.3 inch	14.4 inch	408.5 lbs

Typical Applications

- Telecommunications
- Power Utility
- Solar energy system
- UPS & EPS

Certificates



Constant Current Discharge (Amperes @ 25°C /77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	5847.3	4463.6	4011.3	3559.1	3113.0	2895.0	2683.2	2471.3	2271.9	2110.7	1986.4	1117.9	882.2	738.9	610.9	322.8	169.0
1.65	5556.5	4241.6	3816.3	3391.0	2971.8	2766.4	2567.2	2368.0	2181.1	2032.5	1920.8	1079.7	857.0	721.2	600.8	317.7	166.4
1.70	5265.8	4019.7	3621.3	3222.8	2830.6	2636.9	2449.5	2262.0	2087.0	1950.1	1850.2	1038.7	831.8	703.6	590.7	312.7	163.9
1.75	4968.5	3792.8	3419.5	3046.3	2679.3	2498.2	2323.4	2148.6	1986.1	1861.9	1774.5	994.70	796.5	678.4	575.6	307.7	161.4
1.80	4671.2	3565.8	3217.8	2869.8	2528.0	2359.5	2197.3	2035.1	1885.2	1773.6	1698.9	950.72	761.2	653.1	560.5	302.6	158.9

Constant Power Discharge (Watts/cell @ 25°C /77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	9408.5	7182.0	6676.0	6170.0	5658.8	5316.8	4969.6	4622.4	4278.0	3991.2	3770.9	2174.4	1695.3	1470.2	1205.8	645.6	337.9
1.65	9078.1	6929.9	6413.7	5897.6	5376.4	5056.2	4730.9	4405.6	4082.9	3818.0	3619.6	2086.5	1649.9	1439.9	1190.7	635.5	332.9
1.70	8384.4	6400.3	5963.2	5526.1	5083.9	4786.3	4483.7	4181.1	3881.2	3639.0	3463.3	1995.6	1604.5	1407.2	1170.5	625.4	327.8
1.75	7869.0	6006.9	5603.4	5199.9	4791.3	4515.7	4234.9	3954.2	3676.1	3455.7	3301.9	1901.7	1554.1	1371.8	1150.3	615.3	322.8
1.80	7347.1	5608.4	5238.6	4868.7	4493.8	4239.1	3979.4	3719.6	3462.6	3263.2	3130.4	1802.0	1448.2	1311.3	1135.2	605.2	317.7

Subject to revision without notice. Please contact our sales representatives for latest version.



Web: www.genergybattery.com | Email: sales@genergybattery.com

NL2-3000


2V3000Ah / 10hr rate




Graphs

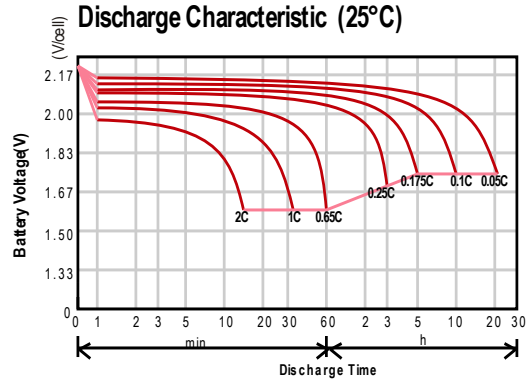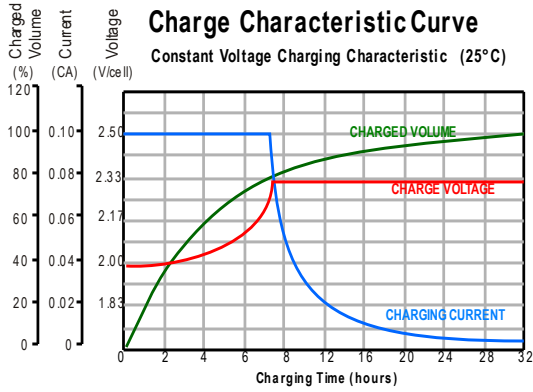


Temperature Effects On Float Life

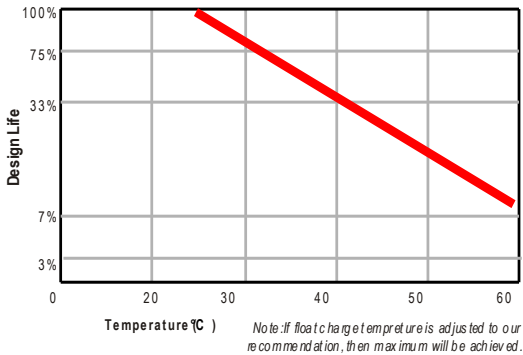


Cycle Service Life V.S. Depth Of Discharge

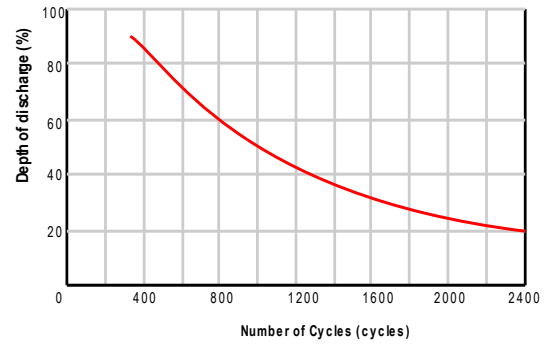


Charging Voltage V.S. Temperature

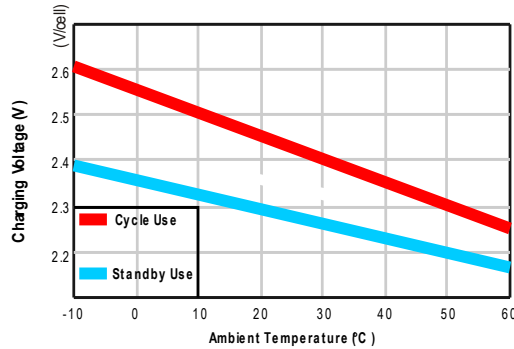

Self-Discharge Characteristic

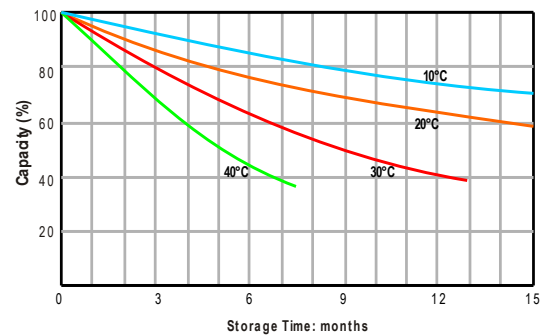

Life Characteristics Of Standby Use

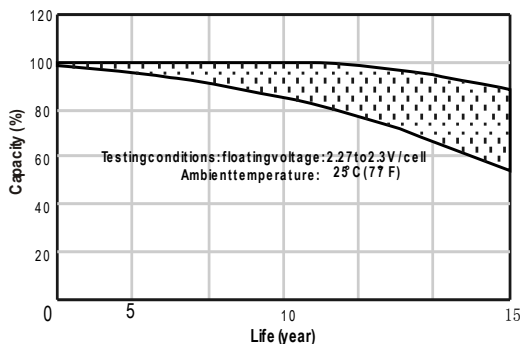

Temperature Effects On Capacity

