

# EB12-38

12V38Ah / 10hr rate



## Introduction

**Generagy EB series** is designed for European standard with 12-year design life in float service. The series battery is featured of high consistency, excellent performance and reliable standby service life. It is widely applied in float service, UPS/EPS, medical equipment, telecom, photovoltaic, control system and security system.

## Battery Features

- Increase durability and deep cycle ability for heavy demand applications
- Low self-discharge
- Fully tank formed plates
- Low impurity electrolyte
- Spill proof / leak proof
- Multi-position usage
- ABS case and cover VO upon request
- Very high purity lead

## Electrical Specification

Design floating Life @ 20°C (68°F)	12 years
Nominal Capacity @ 20°C (68°F)	
20 hour rate 2.02 A to 1.75Vpc	40.4 Ah
10 hour rate 3.83 A to 1.80Vpc	38.3 Ah

### Internal Resistance

(Fully charged battery @ 20°C (68°F)) ..... 10mΩ

Max. Discharge Current @ 20°C (68°F) ..... 380 A (5S)

### Charge Methods: Constant voltage charge @ 20°C (68°F)

Cycle Use ..... 14.7 ~ 14.9V

Max. Current ..... 9.5 A

Standby Use ..... 13.6 - 13.8V

Operating Temperature Range ..... -30 ~ 50°C


Notes: battery voltage must be adjusted according to temperature.

Please refer to our recommendation.

### Self-Discharge

3% of capacity declined per month @ 20°C (68°F).

## Battery Picture & Terminal Layout

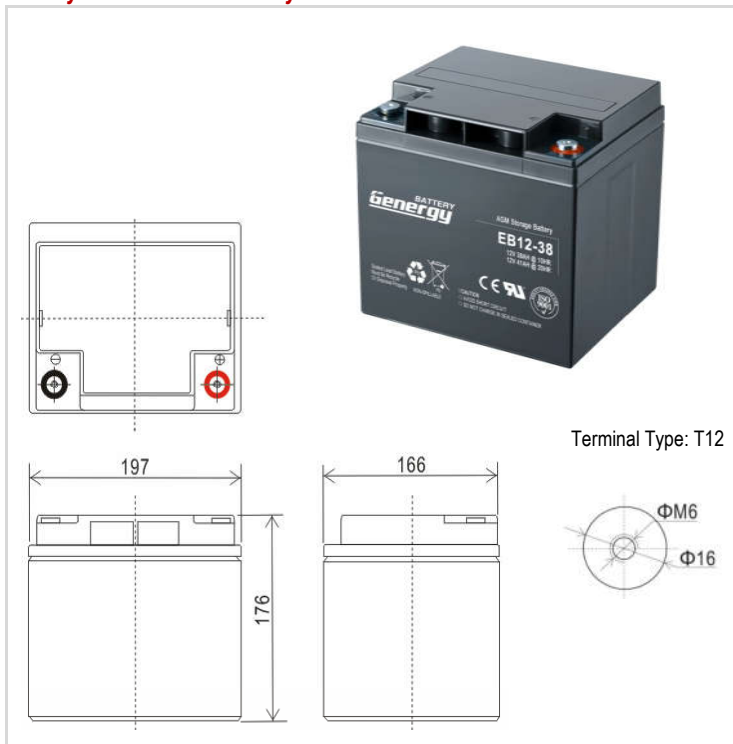

## Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height	Height		
197 mm	166 mm	176 mm	176 mm	176 mm	12.1 kg
7.8 inch	6.5 inch	6.9 inch	6.9 inch	6.9 inch	26.7 lbs

## Typical Applications

- UPS & EPS
- Telecommunications
- Power Utility
- Security Power Supply

## Certificates



## Constant Current Discharge (Amperes @ 20°C (68°F))

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	94.16	71.88	62.09	52.31	44.28	39.84	37.15	34.46	32.22	30.28	28.79	15.61	11.11	9.22	7.54	4.03	2.04
1.65	89.41	68.25	59.28	50.31	43.09	38.78	36.23	33.67	31.56	29.76	28.40	15.31	10.89	9.03	7.37	4.01	2.04
1.70	85.72	65.44	56.94	48.45	41.70	37.50	35.04	32.59	30.58	28.88	27.62	14.79	10.64	8.82	7.19	3.97	2.04
1.75	81.76	62.42	54.40	46.39	40.12	36.08	33.79	31.50	29.66	28.12	27.03	14.38	10.41	8.63	7.04	3.93	2.02
1.80	77.54	59.19	51.73	44.26	38.54	34.63	32.48	30.32	28.61	27.21	26.25	13.87	10.16	8.41	6.87	3.83	2.00

## Constant Power Discharge (Watts/cell @ 20°C (68°F))

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	163.53	124.83	109.86	94.88	82.71	74.61	69.30	64.00	59.50	55.70	52.49	28.86	21.00	17.42	14.35	8.04	4.24
1.65	157.73	120.40	106.18	91.96	80.53	72.63	67.53	62.43	58.12	54.52	51.52	28.27	20.81	17.23	14.16	7.96	4.24
1.70	151.66	115.77	102.23	88.70	77.96	70.33	65.49	60.65	56.61	53.28	50.54	27.59	20.42	16.93	13.94	7.81	4.18
1.75	145.07	110.74	97.96	85.17	75.19	67.82	63.25	58.68	54.91	51.84	49.37	26.71	19.84	16.52	13.69	7.75	4.11
1.80	137.94	105.30	93.34	81.38	72.23	65.12	60.82	56.51	53.01	50.20	48.00	25.77	19.32	16.10	13.38	7.67	4.07

Subject to revision without notice. Please contact our sales representatives for latest version.

Web: [www.generagybattery.com](http://www.generagybattery.com) | Email: [sales@generagybattery.com](mailto:sales@generagybattery.com)

Version NO.20200508


Page 1 of 2

# EB12-38

12V38Ah / 10hr rate



Graphs

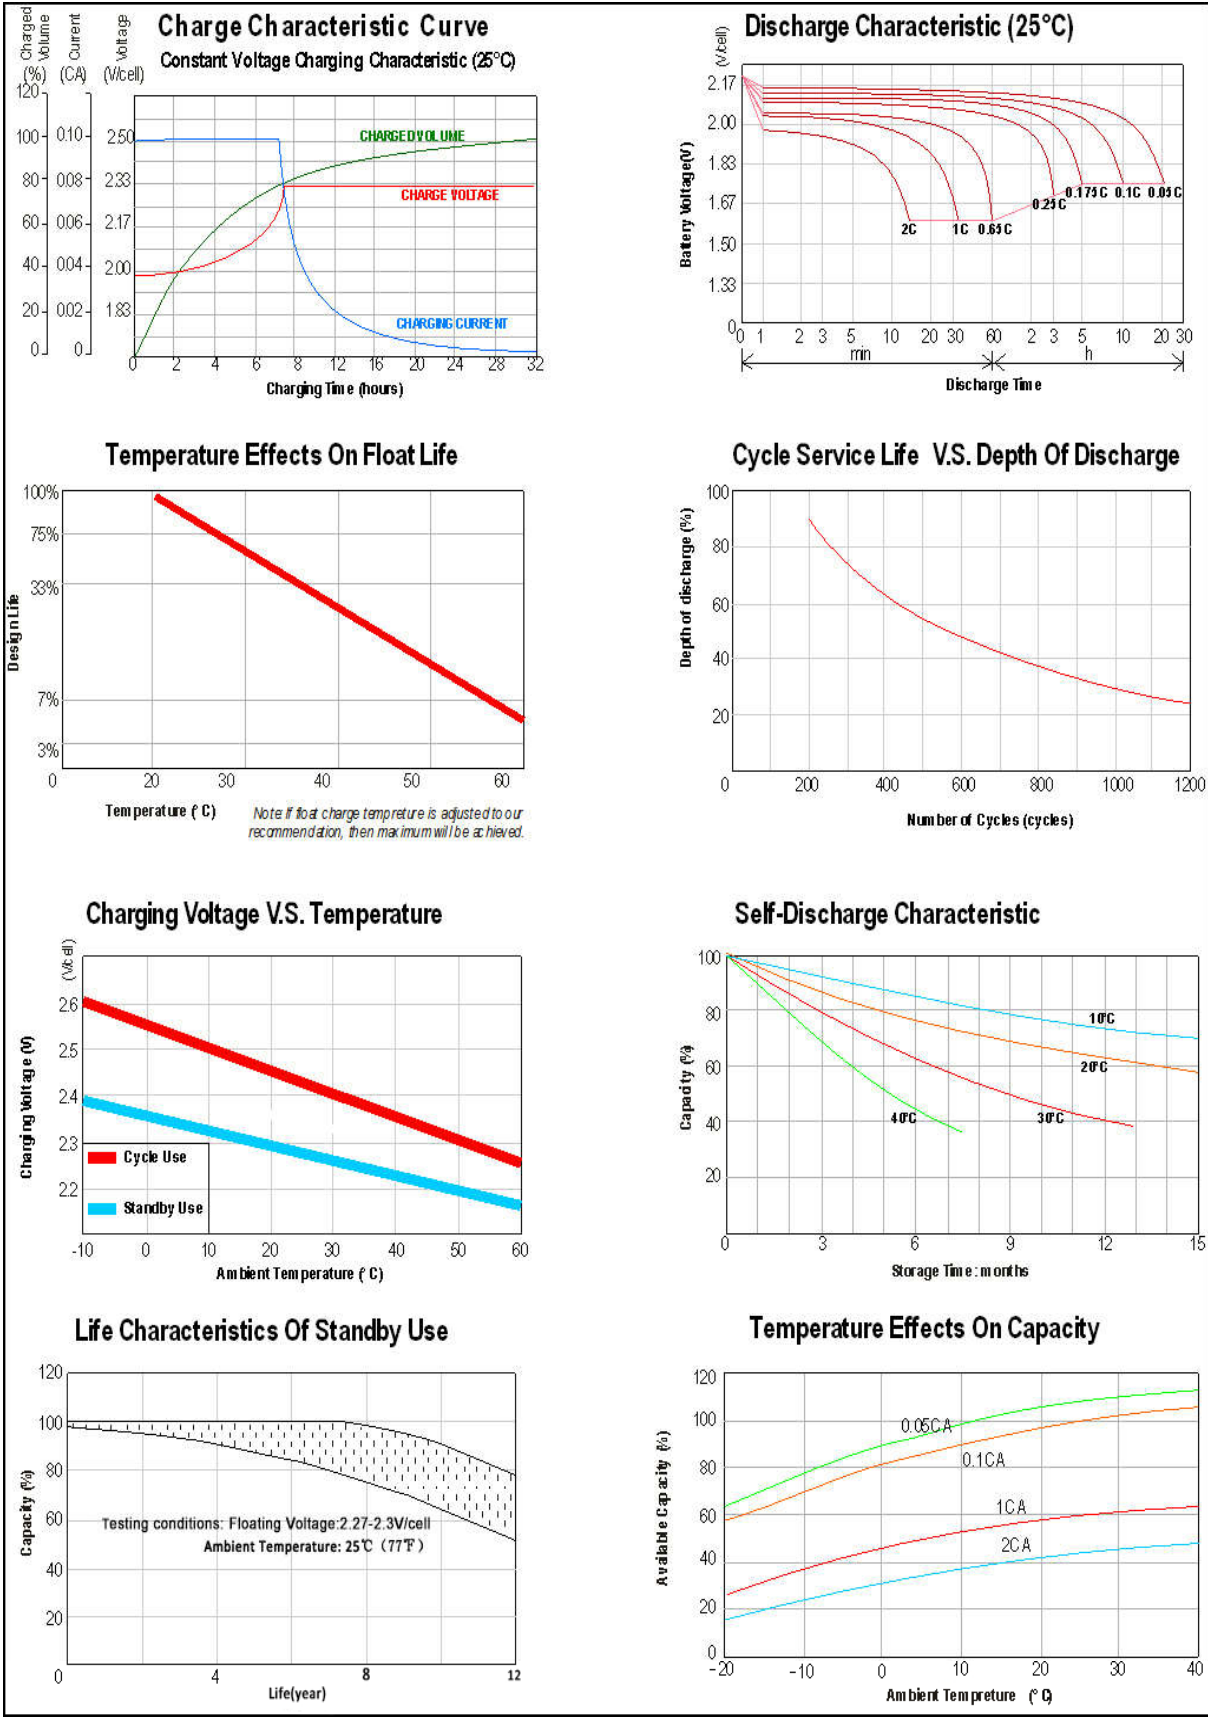

Subject to revision without notice. Please contact our sales representatives for latest version.  
 Web: [www.genergybattery.com](http://www.genergybattery.com) | Email: [sales@genergybattery.com](mailto:sales@genergybattery.com)